


Safety Equipment

EaS-Configurator DEHN SE

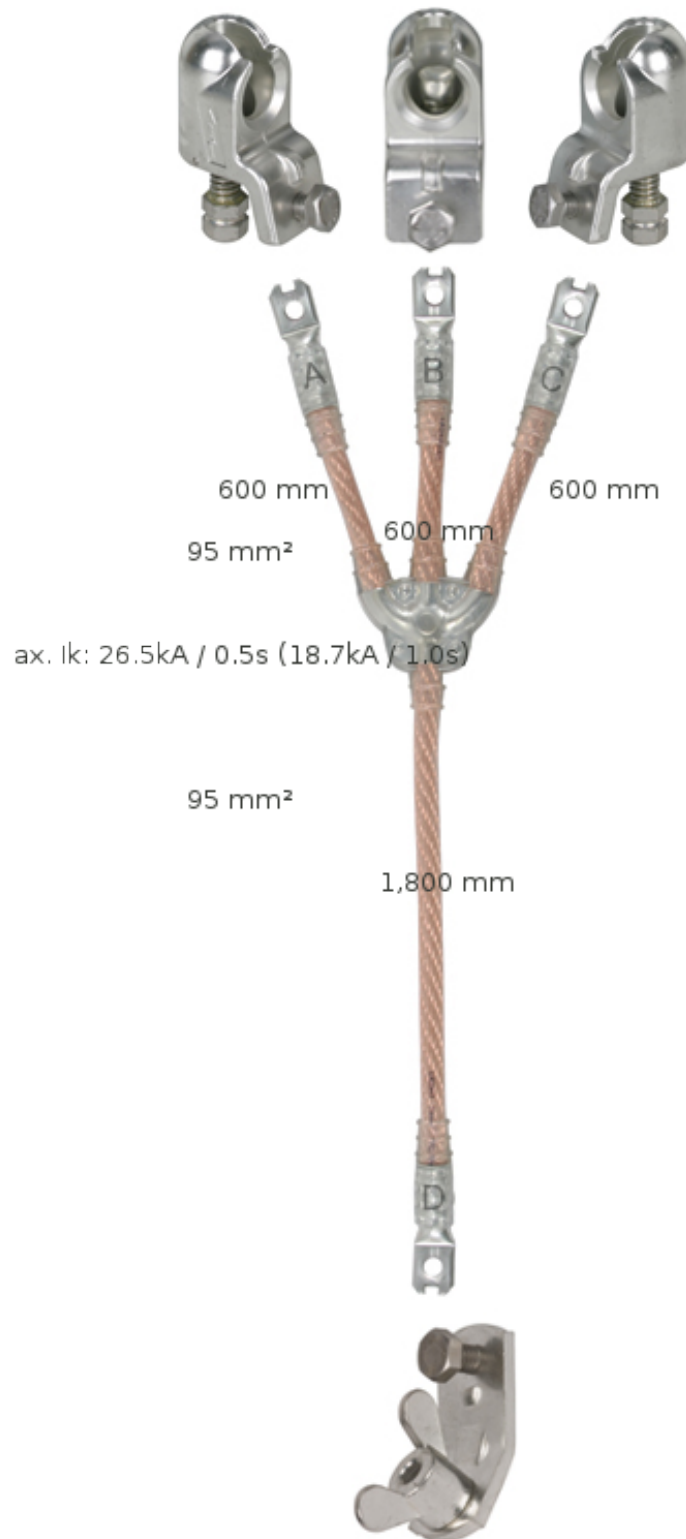

Safety Equipment

EaS-Configurator DEHN SE



EaS configurator DEHN SE

Ordering information	Name	Description	Amount
Variant number VSNMW9X	EKV3+1 95 G	Three-pole earthing and short-circuiting device in accordance with EN/IEC 61230 (DIN VDE 0683 Part 100) cable cross-section: 95 mm ² / 95 mm ² Type of material: Copper Max. short-circuit current / duration: 26.5 kA / 0.5 s - 2.5 Length A: 600 mm Length B: 600 mm Length C: 600 mm Length D: 1,800 mm	1
	KKH 25 SK	Rigid ball head cap Ø25 mm, hexagon shaft Part No. 772 320	
	EAS EK FM 16	M16 earth connection unit, with wing nut Part No. 775 631	

Note

Unfortunately, EaS devices cannot be returned.
Please order accessories separately if required!

Information on

KKH 25 SK	Data Sheet Part No. 772 320 (Type KKH 25 SK)
EAS EK FM 16	Data Sheet Part No. 775 631 (Type EAS EK FM 16)

We reserve the right to modify design, technology, dimensions, weights and materials according to technical progress. Illustrations are non-binding. Pictures may differ from the modules described.