


## PHV1P 20 36 (759 736)

- Easy transport due to detachable insulating stick

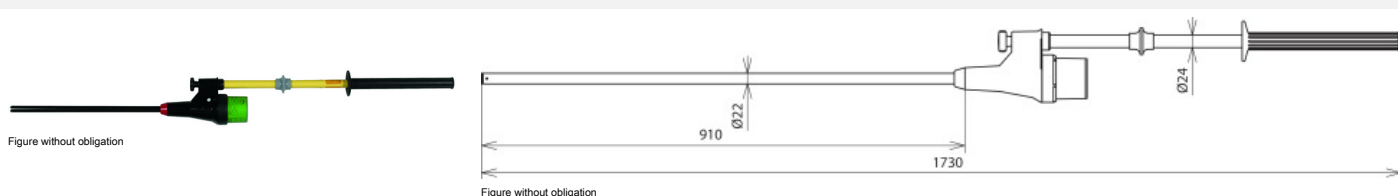

Type	PHV1P 20 36
Part No.	759 736
Nominal voltage (U <sub>N</sub> )	20 ... 36 kV
Type of voltage	a.c.
Frequency	50 Hz
Total length (l <sub>o</sub> )	1730 mm
Insertion depth (l <sub>i</sub> )	910 mm
Standard	EN/IEC 61481-1 (DIN VDE 0682-431-1)
Temperature range	-25 °C ... +55 °C, climatic category N
Design	Straight
For use at	▲
For	Indoor and outdoor installations
Design	Single-pole
Indication	Visual
Self-testing element	Yes
Battery	Lithium AA 1.5 Volt
Material (test prod)	Plastic
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Weight	1,46 kg
Customs tariff number (Comb. Nomenclature EU)	90303370
GTIN	4013364259263
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.