


## PHEG1 FD P 3 (767 610)

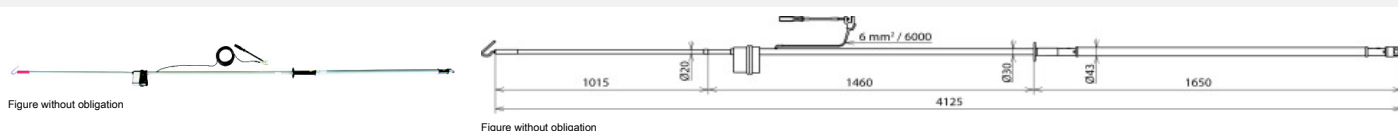

One stick (three elements)  
 For direct voltage systems with earthed negative pole  
 Positive pole: indicator with test prod  
 Negative pole: earth clamp  
 Type: without magnet

Type	PHEG1 FD P 3
Part No.	767 610
Threshold voltage (U <sub>t</sub> )	1.1 kV
Nominal voltage (U <sub>N</sub> )	3.0 kV
Type of voltage	d.c.
Length (indicator with test prod) (l <sub>s</sub> )	1245 mm
Length (insulating stick) (l <sub>1</sub> )	1500 mm
Length (extension handle) (l <sub>2</sub> )	1470 mm
Length (earthing cable)	6000 mm
Total length (l <sub>c</sub> )	4125 mm
Earth clamp	Without magnet
Standard	Based on EN/IEC 61243-1 (DIN VDE 0682-411)
Temperature range	-25 °C ... +55 °C, climatic category N
For use at	▲
For	Indoor and outdoor installations
Application	Overhead contact lines
Design	Two-pole
Indication	Visual
Self-testing element	Yes
Material (test electrode)	Copper alloy/gal Sn
Material (test prod)	Glass-fibre reinforced polyester tube
Material (indicator)	Plastic, fully insulated
Material (insulating stick)	Glass-fibre reinforced polyester tube
Material (connecting cable)	Highly flexible copper cable
Weight	4,4 kg
Customs tariff number (Comb. Nomenclature EU)	90303370
GTIN	4013364135208
PU	1 pc(s)

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.