


PHEG1 S P SN7240 (767 636)

- Earth clamp with adjustable handle
- Insulating stick with plug-in coupling as end fitting for extending the handle
- Easy transport due to detachable insulating stick

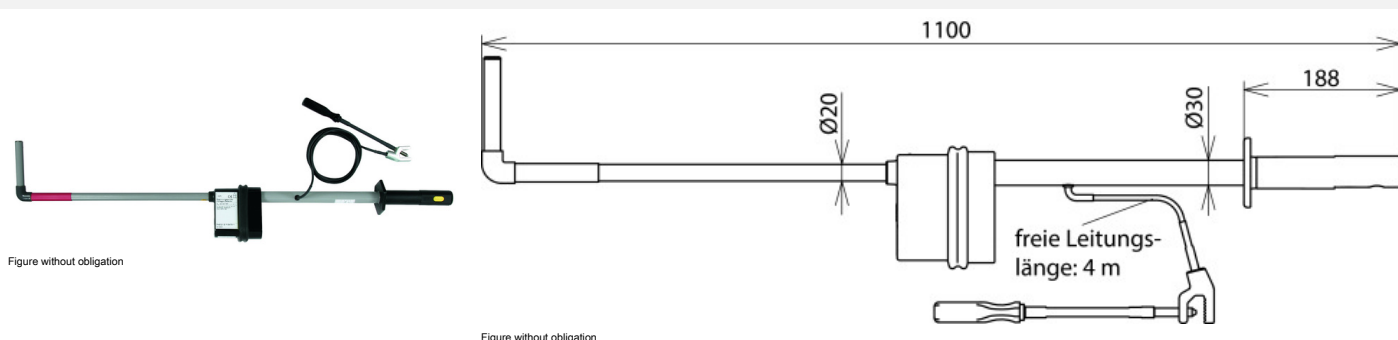

| Type | PHEG1 S P SN7240 |
|---|--|
| Part No. | 767 636 |
| Threshold voltage (U_t) | 60 V |
| Nominal voltage (U_N) | 3.8 kV |
| Type of voltage | d.c. |
| Length (indicator with test prod) (l_s) | 615 mm |
| Length (insulating stick) (l_i) | 550 mm |
| Length (earthing cable) | 4000 mm |
| Total length (l_a) | 1100 mm |
| Standard | Based on EN/IEC 61243-2 (DIN VDE 0682-412) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| For use at | ▲ |
| For | Indoor and outdoor installations |
| Application | Switchgear installations |
| Design | Two-pole |
| Indication | Indoor and outdoor installations, for example d.c. voltage systems (electrified rail networks, d.c. links) |
| Self-testing element | Yes |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (test prod) | Glass-fibre reinforced polyester tube |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Material (connecting cable) | Highly flexible copper cable |
| Weight | 2,31 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364155886 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.