

PHE3 6 20 S ZK (767 951)

- Easy transport due to detachable insulating stick (ZK) and test prod
- Insulating stick with plug-in coupling for extending the handle

Figure without obligation

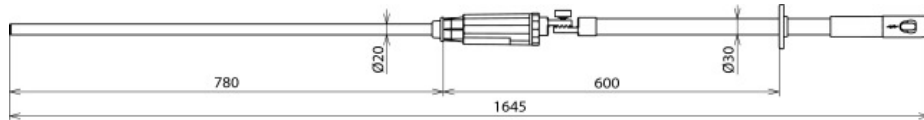


Figure without obligation

| Type | PHE3 6 20 S ZK |
|---|---|
| Part No. | 767 951 |
| Nominal voltage (U _N) | 6 ... 20 kV |
| Type of voltage | a.c. |
| Frequency | 50 Hz |
| Category | S 63 |
| Total length (l _c) | 1645 mm |
| Insertion depth (l _o) | 780 mm |
| Length (indicator with test prod) | 1010 mm |
| Standard | EN/IEC 61243-1 (DIN VDE 0682-411) |
| Temperature range | -25 °C ... +55 °C, climatic category N |
| Design | Complete |
| For use at | ⚡ |
| For | Indoor and outdoor installations |
| Application | Switchgear installations and overhead lines |
| Design | Single-pole |
| Indication | Acoustic and visual |
| Self-testing element | Yes |
| Material (test electrode) | Copper alloy/gal Sn |
| Material (test prod) | Glass-fibre reinforced epoxy resin tube |
| Material (indicator) | Plastic, fully insulated |
| Material (insulating stick) | Glass-fibre reinforced polyester tube |
| Weight | 1,26 kg |
| Customs tariff number (Comb. Nomenclature EU) | 90303370 |
| GTIN | 4013364134799 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.